


# AAR/100

Automatic P.F.C. equipment with Detuning Reactors

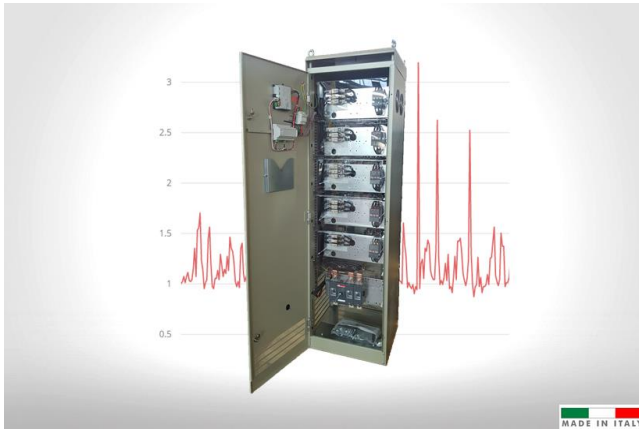

**AAR/100** series equipment are particularly suitable for three-phase networks with **high harmonic distortion**. These equipment guarantee an accurate P.F.C., thanks to a multi-step design that effectively divides the power. In addition, on the G6E and G8E cabinet, all the capacitors banks are assembled on racks, easily removable from the front of the panel, for simple management and maintenance.

## PERFORMANCE DATA

■ Rated voltage	400 Vac (others on request)
■ Rated frequency	50 Hz (60 Hz on request)
■ Insulation voltage	690 Vac
■ auxiliary voltage	230 Vac (110 Vac on request)
■ Overvoltage	1,1 Un (rated voltage)
■ Temperature range	-5 / +40 °C
■ Impulse withstand	6 kV (G4E); 8 kV (G4RM, G6E, G8E)

## HARMONIC CONTENT

THD(I)max. = 100%	on the network
THD(U)max. = 3%	on the network
p = 7%	

## TECHNICAL DATA

<b>Enclosures</b>	Made of sheet steel, protected against corrosion by phosphating and epoxy powder coating. RAL 7035 colour (others on request). Degree of protection: external panel IP 31, with the exception of type G4E with IP30 (others on request); internal panel IP 20 at the input of power cables (IP 20 with open doors on request).
<b>Installation</b>	Indoor installation, in a well ventilated position away from heat sources.
<b>Ventilation</b>	Forced.
<b>Switch isolator</b>	Tri-polar off-load disconnecter.
<b>Wiring</b>	The internal connections are made with flame retardant cables with very low smoke emission (other types of cables on request). On the non-pre-insulated terminals the connection point is covered with a long-life heat-shrinking sheath. The auxiliary voltage are appropriately identified in compliance with current regulations.
<b>3-pole contactors</b>	Each battery is switched on / off by a three-pole contactor (Class AC6-b) to offer high reliability.
<b>Fuses</b>	Each capacitors bank is protected by fuses. The protection system of both the power circuits (NH-00 curve gG fuses) and the auxiliary ones (isolable fuse holders and 10.3x38 fuses) foresees the use of high breaking power fuses (100kA).
<b>Capacitors</b>	Single-phase capacitors in self-healing metallized polypropylene (MKP), equipped with an anti-burst device and discharge resistance. They are impregnated in vegetable oil, PCB free. Delta connection. Type of continuous service. <ul style="list-style-type: none"><li>• rated voltage: 500 Vac (maximum voltage 550 Vac)</li><li>• overvoltage: 1.1 x A (8h / 24h)</li><li>• current overload: 1.3 x In</li><li>• capacity tolerance: -5% / + 10%</li><li>• losses due to dissipation: <math>\leq 0.4</math> W / kvar</li><li>• temperature category: -25 / D</li></ul>
<b>Detuning reactors</b>	<b>Tuning frequency: 189 Hz (p = 7%)</b> Power losses: 6 W / kvar (AVG) Max. Harmonic distortion of the voltage allowed on the networks is: THDU = 3% (189 Hz). On request: AAR / 6 (THDU = 10%).
<b>Controller</b>	<ul style="list-style-type: none"><li>• type of measurement: varmetric.</li><li>• amperometric signal: by means of an amperometric transformer with secondary 5A, class 1 - 5VA (by the user)</li><li>• amperometric signal sensitivity: 2.5% for BMR series, 0.3% for HPR series</li><li>• standard capacitors on / off times: 25 "± 30" (others on request)</li></ul>

## QUALITY AND TESTING

<b>Regulations</b>	Capacitors: IEC/EN 60831-1 / 2 certified by IMQ (V1927); Equipment: IEC/EN 61439-1 / 2, IEC/EN 61921.
<b>European directives</b>	Low voltage: 2014/35/CE; Electromagnetic compatibility: 2014/30/CE.

### Testing

100% of the automatic equipment is subject to visual inspection, insulation test: phase-phase and phase-earth, battery efficiency and ventilation circuit control: the report is included in the documentation. The capacitors are tested in three consecutive stages of the production process: after winding, regeneration and before labeling.


## CONFIGURATION


### General notes

- For dimensions, please consult the cabinet drawings, referring to the "Type" column.
- The indication for cable entry (power supply) is as follows: ↑ from the bottom, ↙ side up, ↓ from the top
- The rated power is expressed at 400 V - 50 Hz.

The choice of supply cables depends on the installation conditions, the length of the same and the ambient temperature. For a correct sizing, refer to the IEC 60364-5, CEI 64-8 and the UNEL 35024/01 standards.

### Cloud Control System (CCS)

The symbol  indicates that CCS, the remote monitoring system, is pre-installed on the P.F.C. equipment. For any specific information, and to find out the advantages of the Cloud Control System service, refer to the appropriate brochure available on [www.comarcond.com](http://www.comarcond.com) or directly on request.
























### Table

THD(I)max. = 100%

THD(U)max. = 3%

p = 7%

Code	Type	Qn (kvar)	Cable entry	In (A)	Banks size (kvar)				Steps (n)	Switch isolator (A)	Controlle r (type)	CCS	Weight (kg)
8561402250700	G4E	25	↙	36	6,25	6,25	12,5		4	160	BMR4		88
8561402310700	G4E	31	↙	44	6,25	12,5	12,5		5	160	BMR4		90
8561402435700	G4E	43,5	↙	63	6,25	12,5	25		7	160	BMR4		100
8561402500700	G4RM	50	↓	72	12,5	12,5	25		4	160	BMR4		105
8561402625700	G4RM	62,5	↓	90	12,5	25	25		5	160	BMR4		115
8561402750700	G4RM	75	↓	108	12,5	12,5	25	25	6	160	BMR4		125
8561403100700	G4RM	100	↓	144	25	25	25	25	4	200	BMR4		145
8561403125700	G6E	125	↓	180	25	50	50		5	315	HPR6		200
8561403150700	G6E	150	↓	216	25	50	75		6	400	HPR6		220
8561403175700	G6E	175	↓	252	25	50	50	50	7	400	HPR6		250
8561403200700	G6E	200	↓	288	25	50	50	75	8	500	HPR6		270
8561403225700	G6E	225	↓	324	25	50	75	75	9	500	HPR6		300
8561403250700	G6E	250	↓	360	25	25	50	75	10	630	HPR6		320
8561403275700	G6E	275	↓	397	25	50	50	75	11	630	HPR6		340
8561403300700	G6E	300	↓	432	25	50	75	75	12	800	HPR6		360
8561403350700	G8E	350	↑	504	50	75	75	75	9	800	HPR6		390
8561403375700	G8E	375	↑	541	25	50	75	75	15	800	HPR6		410
8561403400700	G8E (II)	400	↑	576	50	50	75	75	14	1000	HPR6		550
8561403450700	G8E (II)	450	↑	648	25	50	75	75	18	1000	HPR12		600
8561403500700	G8E (II)	500	↑	720	50	75	75	75	13	1250	HPR12		650
8561403550700	G8E (II)	550	↑	792	50	50	75	75	19	1250	HPR12		700
8561403600700	G8E (II)	600	↑	864	75	75	75	75	8	1600	HPR12		750
8561403650700	G8E (II)	650	↑	936	50	75	75	75	16	800+630	HPR12		800
8561403750700	G8E (II)	750	↑	1080	75	75	75	75	10	800+800	HPR12		850
8561403825700	G8E (III)	825	↑	1191	75	75	75	75	11	800+1000	HPR12		1000
8561403900700	G8E (III)	900	↑	1299	75	75	75	150	12	800+1250	HPR12		1050
8561403975700	G8E (III)	975	↑	1407	75	75	75	150	13	800+1250	HPR12		1100
8561404105700	G8E (III)	1050	↑	1516	75	75	150	150	14	800+1600	HPR12		1150

Other solutions are available on request.