




# Data Sheet Automatic Power Factor Correction Systems

## TECHNICAL DATA COMMON TO ALL SERIES IN STANDARD CONFIGURATION

Enclosure	<p>Made of steel sheet, protected against corrosion by phosphating and epoxy powder coating. Colour RAL 7035. External degree of protection: panel type G3E, G4E <b>IP30</b>; G4RM <b>IP40</b>; G6E, G8E, G9E <b>IP31</b> Internal degree of protection: panels with interlocked switch-disconnector IP20 live parts; IP 20 protection in additional modules In the G6, G8 and G9 cabinets, capacitor banks are assembled on drawers that can be pulled out from the front of the cabinet for quick maintenance G6, G8, G9 cabinets are equipped with eyebolts for lifting</p>
Installation	<p>Indoor installation, in a well ventilated position free from solar radiation. Pollution degree 1 Working temperature: -5 / +40 °C; Relative humidity RH50% @40°C (EN61435-1) Altitude: &lt;1000 asl</p>
Main Disconnector	Three-phase off-load disconnector with door interlock.
Wiring	<p>Internal connections are made with FS17-450/750V insulated, flame-retardant low smoke emission cables. On non-preinsulated cable lugs, the connection point is covered with a durable heat-shrink sleeve. Auxiliary circuits are appropriately identified in accordance with current standards.</p>
Bank insertion	<p>The banks are driven by three-phase contactors (Class AC6-b). Series without tuning reactor have contactors with a pre-insertion resistor to limit peak inrush current Static insertion series are fitted with thyristor insertion modules controlled by microprocessor such that switching on/off occurs when the potential difference between the mains and the capacitors is zero. (zero crossing). The switching time for the insertion of the capacitor banks is approximately 200 ms.</p>
Fuses	The capacitive banks are protected by high breaking capacity fuses (100kA). The protection system for the power circuits uses NH-00 curve gG fuses; for the auxiliary circuits sectionable fuse holders and 10.3x38 fuses.
Auxiliary circuits	<p>400 Vac for G3E, G4E, G4RM 230 Vac for G6E, G8E, G9E Internal transformer</p>
Impulse withstand	6 kV for type G3E, G4E; 8 kV for G4RM, G6E, G8E, G9E
Capacitors	<p>Single-phase capacitors made of self-healing metallised polypropylene (MKP), equipped with over-pressure device and discharge resistance. Impregnated with PCBs-free vegetable oil. Delta connection. Continuous duty type. - overvoltage: 1.1 x Un (8h / 24h) - current overload: 1.3 x In - capacitance tolerance: -5% / +10%. - Dielectric losses: ≤0.2 W/kvar; total dissipation losses: ≤0.4 W/kvar - temperature category: -25 / D In the higher-performance series, '<b>Heavy Duty</b>' capacitors made of high thickness film and multiple elements in series are installed to reduce the effect of high currents on the element heads</p>
Tuning reactor (where present)	<p>Iron core with oriented crystals; aluminium windings Resin impregnation Dissipation loss (average): 6W/kvar Over-temperature control probe</p>
Controller	<p>Electronic, measurement type: varmetric on 4 quadrants. Current signal: via current transformer (user-supplied) with 5A secondary, class 1 Current signal sensitivity: 2.5% for BMR series, 0.3% for HPR series</p>
Ventilation	<p>Natural for series without de-tuning chokes with power below 200 kvar. Forced by high-efficiency fans with top expulsion for others</p>
CCS	<p>remote monitoring system for real time data display, emailing of alarms, historical data storage. Included on DMP-FTV, AAR/6, AAR/D20 series; on request on other series The symbol  indicates that the equipment is equipped with CCS The symbol  indicates that the CCS system is installable on the equipment</p>
Safety	<p>Automatic equipment shut-down in case of high THDI, over-temperature &gt;50°C, under and overvoltage. bank shut down for reactor overtemperature (where fitted) Dry contact NC for extreme internal temperature (&gt;70°C) In addition on HPR controller: auto shut-down for high THDu, loss of capacitance of the bank</p>
Testing	<p>100% of the equipment undergoes visual inspection, phase-to-phase and phase-to-ground insulation tests, bank efficiency and ventilation circuit checks. Capacitors are tested for capacitance, dissipation factor [tan(δ)], verification of insulation to earth and overvoltage resistance at three consecutive points of the production process: after winding, during ageing process and at final assembly</p>
Regulation	<p>Capacitors: IEC/EN 60831-1 / 2 certified by IMQ (V1927) Equipment: IEC/EN 61439-1 / 2, IEC/EN 61921; 2014/35/EC Electromagnetic compatibility: 2014/30/EC.</p>

## Automatic Power Factor Correction with Tuning reactors

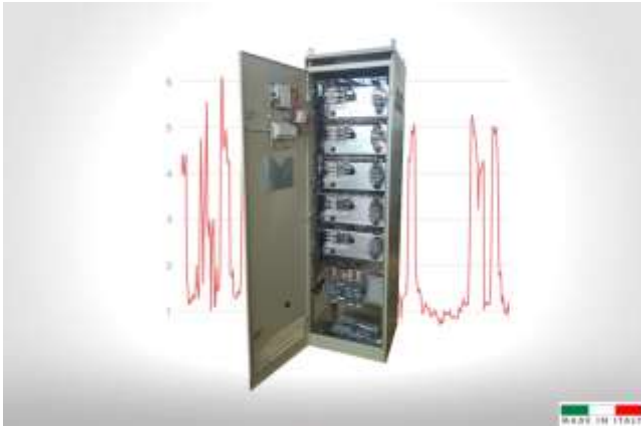

The AAR/138 series are suitable for three-phase networks with an operating voltage of **400 Vac** and **high current distortion with marked presence of the 3rd order harmonic at 150Hz**. (Shopping centres, Data centres, etc.) Heavy Duty capacitors with double elements and increased thickness allow use even in extremely harsh situations.

### PERFORMANCE DATA

- **Rated voltage** 400 Vac (others on request)
- **Rated frequency** 50 Hz (60 Hz on request)
- **Insulation voltage** 690 Vac
- **Voltage overload** 1.1 Un (nominal voltage)
- **Capacitors** Un=550; Umax 600

### HARMONIC CONTENT

THD(I)max. = 100% in the grid

THD(U)max. = 6% in the grid

$p = 14\%$  (138 Hz)

### STANDARD CONFIGURATIONS

Code	Type	Qn (kvar)	Cable entry	In (A)	bank power (kvar)	Steps (n)	Disconnecter (A)	Controller (type)	CCS	Weight (kg)
8821403100750	G6E	100	↓	144	2x25+50	4	250	HPR6	✘	190
8821403125700	G6E	125	↓	180	25+2x50	5	250	HPR6	✘	200
8821403150750	G6E	150	↓	216	2x25+2x50	6	400	HPR6	✘	220
8821403175700	G6E	175	↓	252	25+3x50	7	400	HPR6	✘	250
8821403200750	G9E	200	↑	288	25+2x50+75	8	500	HPR6	✘	270
8821403225750	G9E	225	↑	324	25+50+2X75	9	500	HPR6	✘	320
8821403250750	G9E	250	↑	360	2x25+50+2x75	10	630	HPR6	✘	340
8821403275750	G9E	275	↑	397	25+2x50+2x75	11	630	HPR6	✘	370
8821403300750	G9E	300	↑	432	25+50+3x75	12	800	HPR6	✘	380
8821403350750	G9E	350	↑	504	2x25+4x75	14	800	HPR6	✘	410
8821403400750	G9E (II)	400	↑	576	2x50+4x75	14	1000	HPR6	✘	590
8821403450750	G9E (II)	450	↑	648	25+50+5x75	18	1000	HPR12	✘	640
8821403500750	G9E (II)	500	↑	720	50+6x75	13	1250	HPR12	✘	690
8821403550750	G9E (II)	550	↑	792	2x50+6x75	19	1250	HPR12	✘	740
8821403600750	G9E (II)	600	↑	864	8x75	8	1600	HPR12	✘	790
8821403650750	G9E (II)	650	↑	936	50+8x75	16	800+630	HPR12	✘	840
8821403750750	G9E (II)	750	↑	1080	6x75+2x150	10	800+800	HPR12	✘	890
8821403825750	G9E (III)	825	↑	1191	5x75+3x150	11	800+1000	HPR12	✘	1060
8821403900750	G9E (III)	900	↑	1299	4x75+4x150	12	800+1250	HPR12	✘	1110
8821403975750	G9E (III)	975	↑	1407	3X75+5X150	13	800+1250	HPR12	✘	1160
8821404105750	G9E (III)	1050	↑	1516	2x75+6x150	14	800+1600	HPR12	✘	1210

#### Note

For dimensions, please refer to the mechanical drawings section, referring to the 'Type' column.

- The cable entry (power supply) legend is as follows: ↑ from below, ✓ side up, ↓ from above.
- Rated power is expressed at rated voltage (Un)
- ☒ indicates that the equipment is equipped with CCS
- ✘ indicates that the CCS system is installable on the equipment